



AB2



Features


- Powerfully removes chips by placing nozzle just above the holder.
- Nozzle has internal spring so that holder replacement can be done without nozzle removal.
- Blows air towards the chip discharge outlet of holder with special nozzle.

Structure 1




The nozzle is placed directly above the holder to powerfully spray air. The chip removal ability is significantly improved compared to the conventional model.

Structure 2

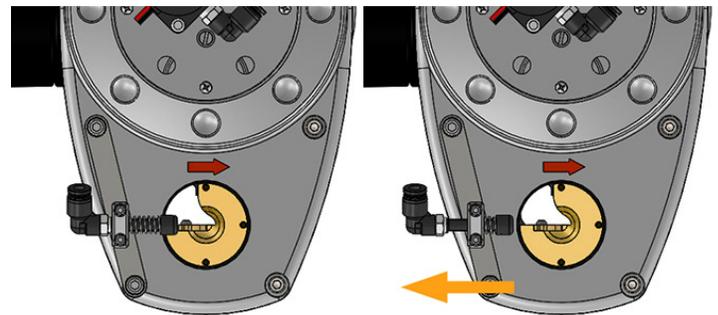

When replacing the holder, simply slide the nozzle and the holder can be replaced without removing the product.

Structure 3

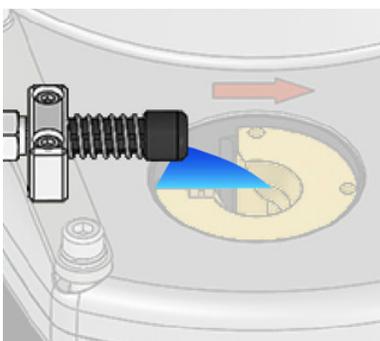

A custom shaped nozzle injects air aimed at the chip discharge port of the holder. The scattering of small chips is reduced compared to the conventional model.