



CDK-R




Features

- Simultaneous dressing of the upper and lower electrodes enables reduction of dressing time and accurate alignment of the face after dress.
- Compliance unit enables reduction of load on the welding gun and the dresser.
- Dresser with built-in rotation confirmation function by proximity sensor (Optional).
- Splash proof terminal box.
- High torque, high-speed rotation (1 sec. dressing).
- KTW cutter dresses upper and lower electrode simultaneously, ensuring tip face alignment and long life span.
- Corresponds to international safety standard: CCC & CE.

Specifications

Model	CDK-R			CDK-R-400						
Power (V)	<AC> 200		220	380	400	415	400	440	460	480
Frequency (Hz)	50	60		50			60			
Current (A)	4.6	4.4	4.2	2.4	2.3	2.3	2.2	2.1	2.0	2.0
Revolution (rpm)	228	273	276	225	228	230	273	276	281	283
Torque (N.m)	34.4	28.7	28.7	38.3	37.7	37.5	31.5	31.1	30.6	30.4
Output (W)	1000									
Rated Time	Continuous use five minutes									
Weight (Kg)	17.8									

Cutter & Holder

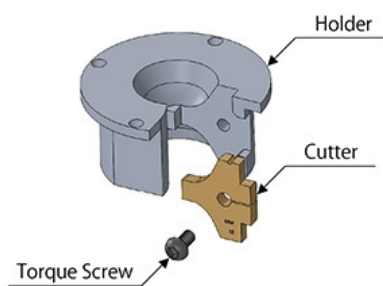

Terminal Box



Splash proof terminal box

*Please contact our sales for special requirements.