



CDK-BAYO

Features




- Adoption of one touch holder which does not require any tools.
- Simultaneous dressing of the upper and lower electrodes enables reduction of dressing time and accurate alignment of the face after dress.
- Compliance unit enables reduction of load on the welding gun and the dresser.
- Dresser with built-in rotation confirmation function by proximity sensor (Optional).
- Splash proof terminal box.
- High torque, high-speed rotation (1 sec dressing).
- Cutter dresses upper and lower electrode simultaneously, ensuring tip face alignment and long life span.
- Corresponds to international safety standard: CCC & CE.

Specifications

Model	CDK-BAYO			CDK-BAYO-400						
	<AC> 200	220		380	400	415	400	440	460	480
Power (V)										
Frequency (Hz)	50	60		50			60			
Current (A)	4.6	4.4	4.2	2.4	2.3	2.3	2.2	2.1	2.0	2.0
Revolution (rpm)	222	266	269	219	222	224	266	269	273	275
Torque (N.m)	35.2	29.4	29.4	39.2	38.6	38.4	32.2	31.8	31.3	31.1
Output (W)	1000									
Rated Time	Continuous use five minutes									
Weight (Kg)	15.7									

Installation

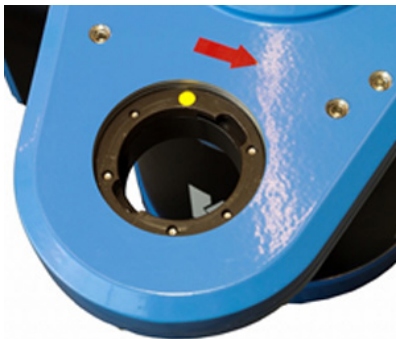

Before Placement



After Placement



Adopt one touch holder which does not require any tool.

Holder & Cutter